

# Casolux Marine light

Marine light system

## DRAIN UNDERWATER LIGHT

GB

IP68  
(5M)




Power  
6 w

Efficiency  
83 Lm/w

Lifetime  
40.000 Hours  
(70% Lumen maintenance)

Input  
12 VDC

Material  
PA

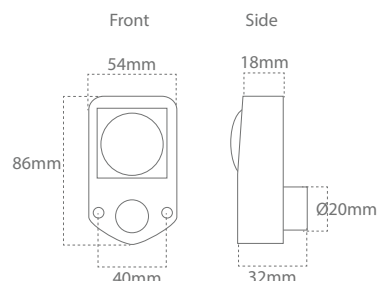

3 x Heatshrinktube with glue  
2 x cable butt splice  
2 x 8g 316L stainless steel screw

Product code	Lumen output	Beam	Power	CCT
UNDERWATER-6W-4500K	500 lm	90°	6 w	4500 K
UNDERWATER-6W-BLUE	500 lm	90°	6 w	BLUE

### Feature

- IP68 design with integral thermal management for long life.
- High precision machining ensures perfect mechanical fit for long life.
- Underwater light IP68 approved down to 5 meters.
- Mounted on existing drain hole.
- Can be custom made in 3000K and green.
- Cabel is 2 meter.

### Material

- Body: PA (Polyamid, Nylon)
- Glass: Tempered glass
- Potting material: Epoxy Rasin

### Benefit

- High reliability
- Maintenance free

### Application

- Marine light

