

*bcm*  
BENEDETTI LIGHTING



NEW  
2024









[www.bcmilluminazione.com](http://www.bcmilluminazione.com)



## Colori freddi - Cold colours

20  
 bianco  
 white

23  
 nero  
 black

|  |   |   |   |
|--|---|---|---|
| acciaio inox<br>stainless steel                | 4<br>  | nickel lucido<br>polished nickel                            | 10<br>   |
| acciaio inox satinato<br>satin stainless steel | 34<br> | nickel satinato v. opaco<br>satin nickel matt p.            | 39<br> * |
| romo lucido<br>polished chrome                 | 3<br>  | nickel nero lucido<br>polished black nickel                 | 8<br> *  |
| romo satinato<br>satin chrome                  | 11<br> | nickel nero satinato v. opaco<br>satin black nickel matt p. | 44<br> * |

\* NEW

## Colori caldi - Warm colours


|  |   |
|--|---|
| ottone lucido<br>polished brass                    | 19<br> * |
| ottone satinato v. opaco<br>satin brass matt p.    | 49<br> * |
| ottone brunito<br>burnished brass                  | 7<br>    |
| ottone brunito v. opaco<br>burnished brass matt p. | 37<br> * |
| rame lucido<br>polished copper                     | 15<br> * |
| rame lucido v. opaco<br>polished copper matt p.    | 45<br> * |

I colori per loro natura sono indicativi, ed eventuali leggere differenze sono da considerarsi nelle tolleranze. La spazzolatura delle finiture dona raffinatezza ai metalli ed è una particolarità che potrebbe variare secondo la tipologia dell'oggetto.  
 Colours are indicative for their own nature and any slight difference is to be considered within tolerance. Refined brushed finishes may vary according to the kind of item.



# cyndi


. 120

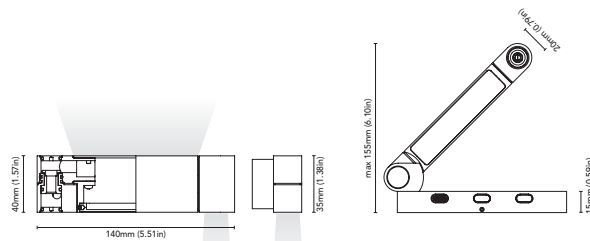

|                            |                                       |
|----------------------------|---------------------------------------|
| <b>CODE</b>                | <b>2202-T-Z1W-B</b>                   |
| <b>FIXTURE</b>             | READING LAMP                          |
| <b>ADJUSTABILITY</b>       | YES                                   |
| <b>LIGHT SOURCE</b>        | POWER LED + COURTESY LED              |
| <b>POWER</b>               | MAX 1W POWER LED, MAX 1W COURTESY LED |
| <b>SUPPLY</b>              | 16-32VDC                              |
| <b>PROTECTION</b>          | FUSE - POLARITY REVERSE SPIKE FILTER  |
| <b>DIMMABLE</b>            | NO                                    |
| <b>BEAM</b>                | WIDE                                  |
| <b>SCREEN</b>              | LENS                                  |
| <b>LED COLOUR</b>          | 3000K<br>CRI 90                       |
| <b>IP RATE</b>             | IP40                                  |
| <b>MATERIALS</b>           | BRASS                                 |
| <b>MOUNTING SYSTEM</b>     | SCREWS                                |
| <b>OPTIONAL LED COLOUR</b> | 2700K, 4000K                          |
| <b>BEAM</b>                |                                       |




cyndi

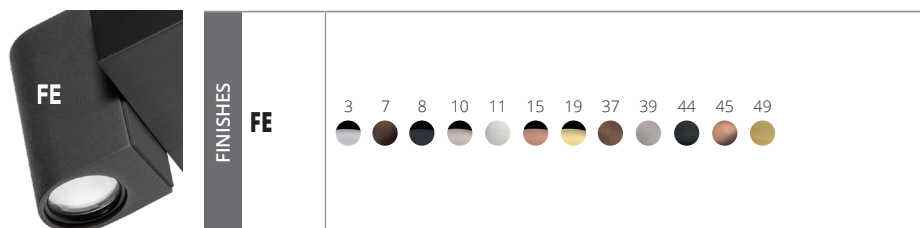




# titan 1


. 50




. 65



|                 |   |
|-----------------|---|
| CODE            | <b>3542-50-F3W</b>  |
| FIXTURE         | FIXED DOWNLIGHT   |
| ADJUSTABILITY   | NO  |
| LIGHT SOURCE    | COB LED   |
| POWER           | MAX 3W  |
| SUPPLY          | 16-32 Vdc - Driver on board   |
| PROTECTION      | FUSE - POLARITY REVERSE<br>SPIKE FILTER                               |
| DIMMABLE        | YES   |
| BEAM            | MEDIUM  |
| SCREEN          | LENS + FILM   |
| LED COLOUR      | 3000K<br>CRI TYP 98<br>LMN 206m<br>1mt 877lx<br>2mt 219lx<br>3mt 97lx |
| IP RATE         | IP65  |
| MATERIALS       | TITANIUM  |
| MOUNTING SYSTEM | WIRE SPRINGS  |
| OPTIONAL        |   |
| LED COLOUR      | 2700K, 4000K  |
| BEAM            | NARROW, WIDE  |



|                 |  |
|-----------------|--|
| CODE            | <b>3542-65-F6W</b>   |
| FIXTURE         | FIXED DOWNLIGHT  |
| ADJUSTABILITY   | NO   |
| LIGHT SOURCE    | COB LED  |
| POWER           | MAX 6W   |
| SUPPLY          | 16-32 Vdc - Driver on board  |
| PROTECTION      | FUSE - POLARITY REVERSE<br>SPIKE FILTER                                  |
| DIMMABLE        | YES  |
| BEAM            | MEDIUM   |
| SCREEN          | LENS + FILM  |
| LED COLOUR      | 3000K<br>CRI TYP 98<br>LMN 461lm<br>1mt 2294lx<br>2mt 573lx<br>3mt 255lx |
| IP RATE         | IP65   |
| MATERIALS       | TITANIUM   |
| MOUNTING SYSTEM | WIRE SPRINGS   |
| OPTIONAL        |  |
| LED COLOUR      | 2700K, 3000K, 4000K  |
| BEAM            | NARROW, WIDE   |



titan 1 . 50



titan 1 . 65



FINISHES


FE-I






# titan 2


. 50




. 65



|                 |  |
|-----------------|--|
| CODE            | <b>3543-50-F3W</b>   |
| FIXTURE         | ADJUSTABLE DOWNLIGHT   |
| ADJUSTABILITY   | YES  |
| LIGHT SOURCE    | COB LED  |
| POWER           | MAX 3W   |
| SUPPLY          | MAX 150mA - Driver not included  |
| PROTECTION      |  |
| DIMMABLE        | YES  |
| BEAM            | NARROW   |
| SCREEN          | LENS + FILM  |
| LED COLOUR      | 3000K<br>CRI TYP 98<br>LMN 164lm<br>1mt 890lx<br>2mt 223lx<br>3mt 99lx |
| IP RATE         | IP65   |
| MATERIALS       | TITANIUM   |
| MOUNTING SYSTEM | WIRE SPRINGS   |
| OPTIONAL        |  |
| LED COLOUR      | 2700K, 4000K   |
| BEAM            | WIDE   |



|                 |   |
|-----------------|---|
| CODE            | <b>3543-65-F6W</b>  |
| FIXTURE         | ADJUSTABLE DOWNLIGHT  |
| ADJUSTABILITY   | YES   |
| LIGHT SOURCE    | COB LED   |
| POWER           | MAX 6W  |
| SUPPLY          | 16-32 Vdc - Driver on board<br>FUUSE - POLARITY REVERSE<br>SPIKE FILTER |
| PROTECTION      |   |
| DIMMABLE        | YES   |
| BEAM            | MEDIUM  |
| SCREEN          | LENS + FILM   |
| LED COLOUR      | 3000K<br>CRI TYP 98<br>LMN 412m<br>1mt 1754lx<br>2mt 438lx<br>3mt 195lx |
| IP RATE         | IP65  |
| MATERIALS       | TITANIUM  |
| MOUNTING SYSTEM | WIRE SPRINGS  |
| OPTIONAL        |   |
| LED COLOUR      | 2700K, 4000K  |
| BEAM            | NARROW, WIDE  |



titan 2 . 50



titan 2 . 65



FINISHES


FE-I






# bright

. R



. Q




|                 |  |
|-----------------|--|
| CODE            | <b>3538-35-Z2W-S</b>                         |
| FIXTURE         | FIXED DOWNLIGHT                              |
| ADJUSTABILITY   | NO   |
| LIGHT SOURCE    | POWER LED                                    |
| POWER           | MAX 2W                                       |
| SUPPLY          | 8-32 VDC - Driver on board                   |
| PROTECTION      | FUSE - POLARITY REVERSE<br>SPIKE FILTER      |
| DIMMABLE        | YES  |
| BEAM            | WIDE   |
| SCREEN          | LENS   |
| LED COLOUR      | 3000K<br>CRI 90                              |
| IP RATE         | IP65   |
| MATERIALS       | BODY: STAINLESS STEEL<br>HEATSINK: ALUMINIUM |
| MOUNTING SYSTEM | WIRE SPRINGS                                 |
| SWITCH          | TOUCH SYSTEM ON THE REFLECTOR                |
| OPTIONAL        |  |
| LED COLOUR      | 2700K, 4000K                                 |
| BEAM            | NARROW, WIDE, TILTED                         |
| ACCESSORIES     | LID, FILM                                    |



|                 |  |
|-----------------|--|
| CODE            | <b>3539-35-Z2W-S</b>                         |
| FIXTURE         | FIXED DOWNLIGHT                              |
| ADJUSTABILITY   | NO   |
| LIGHT SOURCE    | POWER LED                                    |
| POWER           | MAX 2W                                       |
| SUPPLY          | 8-32 VDC - Driver on board                   |
| PROTECTION      | FUSE - POLARITY REVERSE<br>SPIKE FILTER      |
| DIMMABLE        | YES  |
| BEAM            | WIDE   |
| SCREEN          | LENS   |
| LED COLOUR      | 3000K<br>CRI 90                              |
| IP RATE         | IP65   |
| MATERIALS       | BODY: STAINLESS STEEL<br>HEATSINK: ALUMINIUM |
| MOUNTING SYSTEM | WIRE SPRINGS                                 |
| SWITCH          |  |
| OPTIONAL        |  |
| LED COLOUR      | 2700K, 4000K                                 |
| BEAM            | NARROW, WIDE, TILTED                         |
| ACCESSORIES     | LID, FILM                                    |

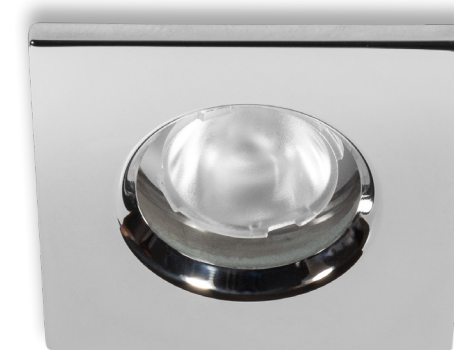

bright . R




bright . Q

FINISHES **FE=I**


23 20 4 34






# shadow

. R



. Q



|                 |  |
|-----------------|--|
| CODE            | <b>3540-35-Z2W-S</b>                         |
| FIXTURE         | FIXED DOWNLIGHT                              |
| ADJUSTABILITY   | NO   |
| LIGHT SOURCE    | POWER LED                                    |
| POWER           | MAX 2W                                       |
| SUPPLY          | 8-32 VDC - Driver on board                   |
| PROTECTION      | FUSE - POLARITY REVERSE<br>SPIKE FILTER      |
| DIMMABLE        | YES  |
| BEAM            | WIDE   |
| SCREEN          | LENS + FILM                                  |
| LED COLOUR      | 3000K<br>CRI 90                              |
| IP RATE         | IP65   |
| MATERIALS       | BODY: STAINLESS STEEL<br>HEATSINK: ALUMINIUM |
| MOUNTING SYSTEM | WIRE SPRINGS                                 |
| SWITCH          | TOUCH SYSTEM ON THE REFLECTOR                |
| OPTIONAL        |  |
| LED COLOUR      | 2700K, 4000K                                 |
| BEAM            | NARROW, WIDE, TILTED                         |
| ACCESSORIES     | LID, FILM                                    |


|                 |  |
|-----------------|--|
| CODE            | <b>3541-35-Z2W-S</b>                         |
| FIXTURE         | FIXED DOWNLIGHT                              |
| ADJUSTABILITY   | NO   |
| LIGHT SOURCE    | POWER LED                                    |
| POWER           | MAX 2W                                       |
| SUPPLY          | 8-32 VDC - Driver on board                   |
| PROTECTION      | FUSE - POLARITY REVERSE<br>SPIKE FILTER      |
| DIMMABLE        | YES  |
| BEAM            | WIDE   |
| SCREEN          | LENS + FILM                                  |
| LED COLOUR      | 3000K<br>CRI 90                              |
| IP RATE         | IP65   |
| MATERIALS       | BODY: STAINLESS STEEL<br>HEATSINK: ALUMINIUM |
| MOUNTING SYSTEM | WIRE SPRINGS                                 |
| SWITCH          |  |
| OPTIONAL        |  |
| LED COLOUR      | 2700K, 4000K                                 |
| BEAM            | NARROW, WIDE, TILTED                         |
| ACCESSORIES     | LID, FILM                                    |



shadow . R





shadow . Q

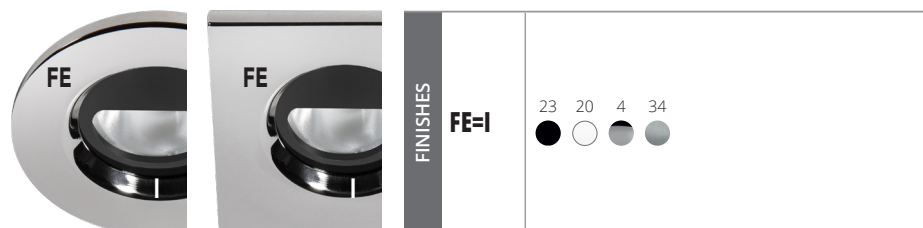





# washer nut



|                     |   |
|---------------------|---|
| CODE                |   |
| FIXTURE             | FIXED COURTESY DOWNLIGHT                          |
| ADJUSTABILITY       | NO  |
| LIGHT SOURCE        | POWER LED   |
| POWER               | MAX 0.5W  |
| SUPPLY              | 8-32 Vdc - Driver on board                        |
| PROTECTION          | FUSE - POLARITY REVERSE SPIKE FILTER              |
| DIMMABLE            | YES   |
| BEAM                | WIDE  |
| SCREEN              | CLEAR   |
| LED COLOUR          | 3000K<br>CRI >80<br>LMN 8lm<br>1mt 3lx<br>2mt 1lx |
| IP RATE             | IP66  |
| MATERIALS           | STAINLESS STEEL AISI 316                          |
| MOUNTING SYSTEM     | SCREWS  |
| OPTIONAL LED COLOUR | 2700K,4000K                                       |




|                     |   |
|---------------------|---|
| CODE                |   |
| FIXTURE             | FIXED COURTESY DOWNLIGHT                          |
| ADJUSTABILITY       | NO  |
| LIGHT SOURCE        | POWER LED   |
| POWER               | MAX 0.5W  |
| SUPPLY              | 8-32 Vdc - Driver on board                        |
| PROTECTION          | FUSE - POLARITY REVERSE SPIKE FILTER              |
| DIMMABLE            | YES   |
| BEAM                | WIDE  |
| SCREEN              | CLEAR   |
| LED COLOUR          | 3000K<br>CRI >80<br>LMN 8lm<br>1mt 3lx<br>2mt 1lx |
| IP RATE             | IP66  |
| MATERIALS           | STAINLESS STEEL AISI 316                          |
| MOUNTING SYSTEM     | SCREWS  |
| OPTIONAL LED COLOUR | 2700K,4000K                                       |



washer




nut

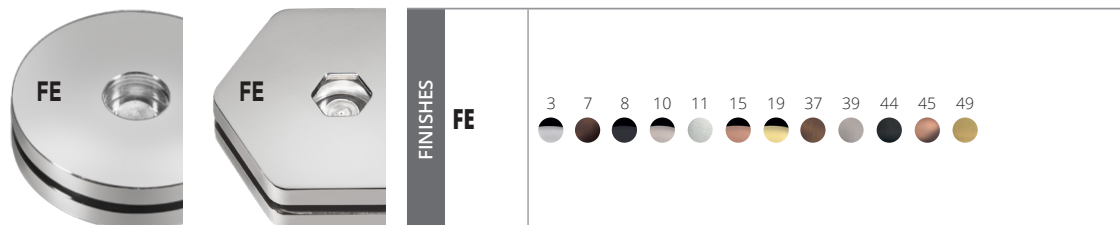




# sablier

|                        |                           |
|------------------------|---------------------------|
| <b>CODE</b>            | <b>4512-I-B8W</b>         |
| <b>FIXTURE</b>         | FIXED DOWNLIGHT           |
| <b>ADJUSTABILITY</b>   | NO                        |
| <b>LIGHT SOURCE</b>    | POWER LED                 |
| <b>POWER</b>           | MAX 8W                    |
| <b>SUPPLY</b>          | 5V USB CHARGER            |
| <b>PROTECTION</b>      | FUSE - POLARITY REVERSE   |
| <b>DIMMABLE</b>        | NO                        |
| <b>BEAM</b>            | WIDE                      |
| <b>SCREEN</b>          | GLASS                     |
| <b>LED COLOUR</b>      | 3000K<br>CRI 90           |
| <b>IP RATE</b>         | IP40                      |
| <b>MATERIALS</b>       | STAINLESS STEEL           |
| <b>MOUNTING SYSTEM</b> | SCREWS (FOR CHARGER BASE) |
| <b>OPTIONAL</b>        |                           |
| <b>LED COLOUR</b>      | 2700K, 4000K              |
| <b>BEAM</b>            |                           |

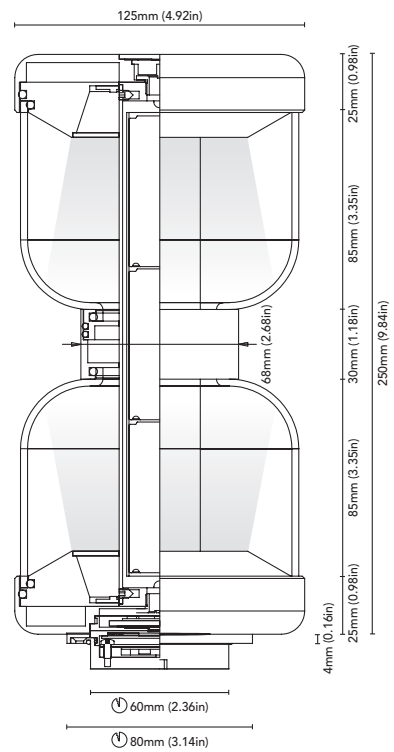


sablier

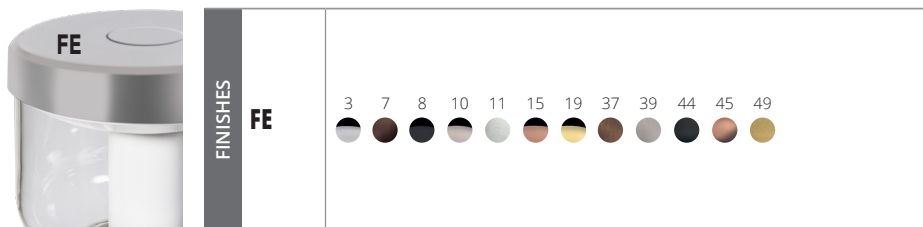



# enne elle

|                            |                           |
|----------------------------|---------------------------|
| <b>CODE</b>                | <b>4513-I-B8W</b>         |
| <b>FIXTURE</b>             | FIXED DOWNLIGHT           |
| <b>ADJUSTABILITY</b>       | NO                        |
| <b>LIGHT SOURCE</b>        | POWER LED                 |
| <b>POWER</b>               | MAX 8W                    |
| <b>SUPPLY</b>              | 5V USB CHARGER            |
| <b>PROTECTION</b>          | FUSE - POLARITY REVERSE   |
| <b>DIMMABLE</b>            | NO                        |
| <b>BEAM</b>                | WIDE                      |
| <b>SCREEN</b>              | GLASS                     |
| <b>LED COLOUR</b>          | 3000K<br>CRI 90           |
| <b>IP RATE</b>             | IP40                      |
| <b>MATERIALS</b>           | STAINLESS STEEL           |
| <b>MOUNTING SYSTEM</b>     | SCREWS (FOR CHARGER BASE) |
| <b>OPTIONAL LED COLOUR</b> | 2700K, 4000K              |
| <b>BEAM</b>                |                           |

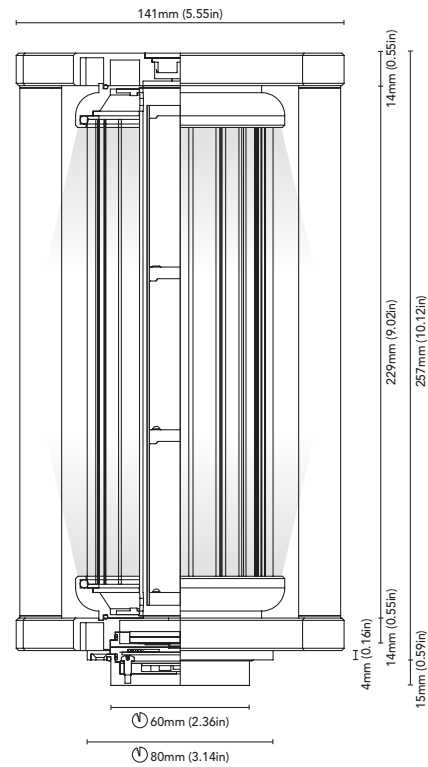


enne elle




FINISHES

FE





# tym track 4

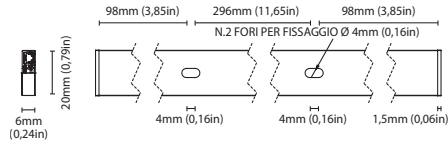


|                                   |                   |
|-----------------------------------|-------------------|
| CODE                              |                   |
| FIXTURE                           | ELECTRIFIED TRACK |
| MAXIMUM RATED CURRENT AND VOLTAGE |                   |
| IP RATE                           | IP20              |
| WEIGHT                            |                   |
| MATERIALS                         | ALUMINIUM         |
| MOUNTING SYSTEM                   | SCREWS            |



tym track 4



# tym track 5

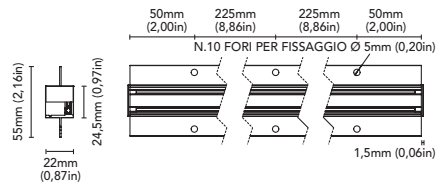

|                                   |                   |
|-----------------------------------|-------------------|
| CODE                              |                   |
| FIXTURE                           | ELECTRIFIED TRACK |
| MAXIMUM RATED CURRENT AND VOLTAGE |                   |
| IP RATE                           | IP20              |
| WEIGHT                            |                   |
| MATERIALS                         | ALUMINIUM         |
| MOUNTING SYSTEM                   | SCREWS            |



tym track 5



- FINISHES
- 23 ●
  - 20 ○

# accessori tyn track 4 - 5







# walkable neonflex

• side


• top



|                     |                             |
|---------------------|-----------------------------|
| CODE                | <b>5421-1MT-10WM</b>        |
| FIXTURE             | FLEXIBLE LED                |
| ADJUSTABILITY       | NO                          |
| LIGHT SOURCE        | POWER LED                   |
| POWER               | 10W/MT                      |
| SUPPLY              | 24 Vdc                      |
| PROTECTION          | PROTECTION POLARITY REVERSE |
| DIMMABLE            | YES                         |
| BEAM                | WIDE                        |
| SCREEN              | BLACK                       |
| LED COLOUR          | 3000K<br>CRI >90<br>LMN     |
| IP RATE             | IP67                        |
| WEIGHT              |                             |
| MATERIALS           | SILICONE                    |
| MOUNTING SYSTEM     | CLIPS                       |
| OPTIONAL LED COLOUR | 2700K - 4000K               |
| IP RATE             |                             |

|                     |                             |
|---------------------|-----------------------------|
| CODE                | <b>5420-1MT-10WM</b>        |
| FIXTURE             | FLEXIBLE LED                |
| ADJUSTABILITY       | NO                          |
| LIGHT SOURCE        | POWER LED                   |
| POWER               | 10W/MT                      |
| SUPPLY              | 24 Vdc                      |
| PROTECTION          | PROTECTION POLARITY REVERSE |
| DIMMABLE            | YES                         |
| BEAM                | WIDE                        |
| SCREEN              | BLACK                       |
| LED COLOUR          | 3000K<br>CRI >90<br>LMN     |
| IP RATE             | IP67                        |
| WEIGHT              |                             |
| MATERIALS           | SILICONE                    |
| MOUNTING SYSTEM     | CLIPS                       |
| OPTIONAL LED COLOUR | 2700K - 4000K               |
| IP RATE             |                             |

On request 12Vdc available.



On request 12Vdc available.







# black walkable sp

• side

• top




|                     |   |
|---------------------|---|
| CODE                | <b>5420-1MT-10WM</b>                          |
| FIXTURE             | FLEXIBLE LED                                  |
| ADJUSTABILITY       | NO  |
| LIGHT SOURCE        | POWER LED                                     |
| POWER               | 10W/MT  |
| SUPPLY              | 24 Vdc  |
| PROTECTION          | PROTECTION POLARITY REVERSE                   |
| DIMMABLE            | YES   |
| BEAM                | WIDE  |
| SCREEN              | OPAL  |
| LED COLOUR          | 3000K<br>CRI >80                              |
| IP RATE             | IP68  |
| WEIGHT              |   |
| MATERIALS           | PU  |
| MOUNTING SYSTEM     | NR.3 CLIPS AND NR.1 ENDCAP FOR METER INCLUDED |
| OPTIONAL LED COLOUR | 2700K - 4000K - 6000K - RGB - RGBW            |
| IP RATE             |   |

|                     |   |
|---------------------|---|
| CODE                | <b>5420-1MT-10WM</b>                          |
| FIXTURE             | FLEXIBLE LED                                  |
| ADJUSTABILITY       | NO  |
| LIGHT SOURCE        | POWER LED                                     |
| POWER               | 10W/MT  |
| SUPPLY              | 24 Vdc  |
| PROTECTION          | PROTECTION POLARITY REVERSE                   |
| DIMMABLE            | YES   |
| BEAM                | WIDE  |
| SCREEN              | OPAL  |
| LED COLOUR          | 3000K<br>CRI >80                              |
| IP RATE             | IP68  |
| WEIGHT              |   |
| MATERIALS           | PU  |
| MOUNTING SYSTEM     | NR.3 CLIPS AND NR.1 ENDCAP FOR METER INCLUDED |
| OPTIONAL LED COLOUR | 2700K - 4000K - 6000K - RGB - RGBW            |
| IP RATE             |   |


On request 12Vdc available.



On request 12Vdc available.

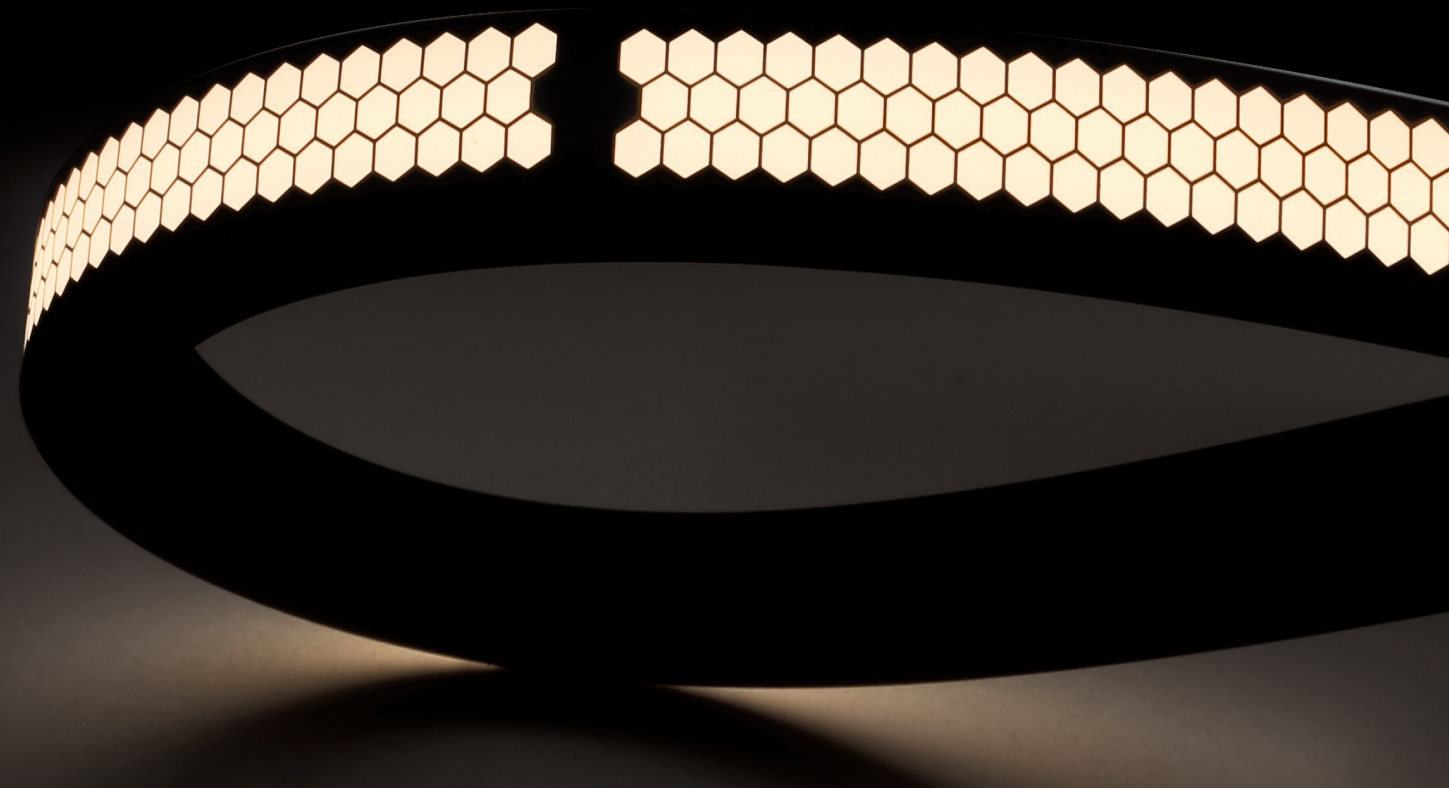


# surf plate r

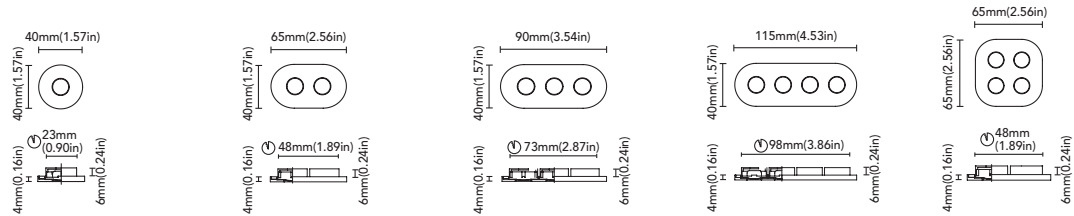


| CODE                   | <b>7050-P001</b><br><b>7050-I001</b><br><b>7050-D001</b> | <b>7050-P002</b><br><b>7050-I002</b><br><b>7050-D002</b> | <b>7050-P003</b><br><b>7050-I003</b><br><b>7050-D003</b> | <b>7050-P004R</b><br><b>7050-I004Q</b><br><b>7050-D004Q</b> | <b>7050-P004Q</b><br><b>7050-I004R</b><br><b>7050-D004R</b> |
|------------------------|--|--|--|---|---|
| <b>SUPPLY</b>          |  |  |  |   |   |
| <b>P:PUSH BUTTON</b>   | 8-32Vdc (backlighting)                                   | 8-32Vdc (backlighting)                                   | 8-32Vdc (backlighting)                                   | 8-32Vdc (backlighting)                                      | 8-32Vdc (backlighting)                                      |
| <b>I:SWITCH</b>        | 8-32Vdc 3X40W@24Vdc                                      | 8-32Vdc 3X40W@24Vdc                                      | 8-32Vdc 3X40W@24Vdc                                      | 8-32Vdc 3X40W@24Vdc   | 8-32Vdc 3X40W@24Vdc   |
| <b>D:DIMMERS</b>       | 8-32Vdc 3X40W@24Vdc                                      | 8-32Vdc 3X40W@24Vdc                                      | 8-32Vdc 3X40W@24Vdc                                      | 8-32Vdc 3X40W@24Vdc   | 8-32Vdc 3X40W@24Vdc   |
| <b>MATERIALS</b>       | STAINLESS STEEL  | STAINLESS STEEL  | STAINLESS STEEL  | STAINLESS STEEL   | STAINLESS STEEL   |
| <b>OPTIONAL SUPPLY</b> |  |  |  |   |   |
| <b>P:PUSH BUTTON</b>   | 10mA MAX   | 10mA MAX   | 10mA MAX   | 10mA MAX  | 10mA MAX  |




surf plate r

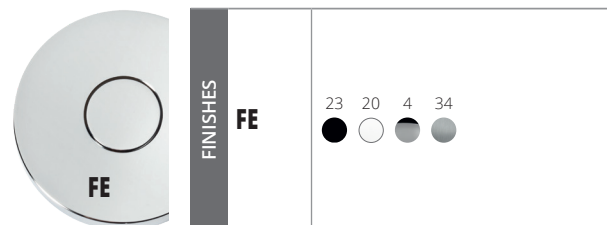

# surf plate q

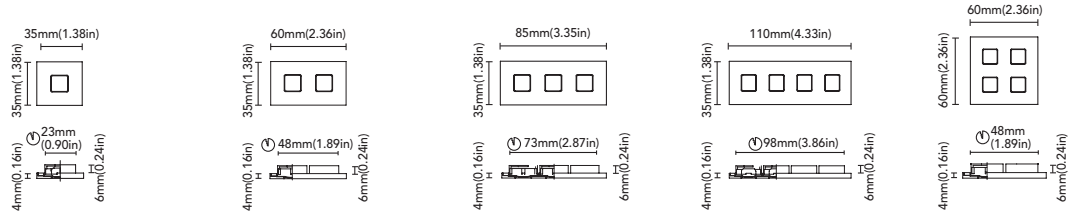

| CODE          | 7051-P001<br>7051-I001<br>7051-D001 | 7050-P002<br>7050-I002<br>7050-D002 | 7050-P003<br>7050-I003<br>7050-D003 | 7050-P004R<br>7050-I004Q<br>7050-D004Q | 7050-P004Q<br>7050-I004R<br>7050-D004R |
|---------------|-------------------------------------|-------------------------------------|-------------------------------------|--|--|
| SUPPLY        |                                     |                                     |                                     |  |  |
| P:PUSH BUTTON | 8-32Vdc (backlighting)              | 8-32Vdc (backlighting)              | 8-32Vdc (backlighting)              | 8-32Vdc (backlighting)                 | 8-32Vdc (backlighting)                 |
| I:SWITCH      | 8-32Vdc 4X40W@24Vdc                 | 8-32Vdc 4X40W@24Vdc                 | 8-32Vdc 4X40W@24Vdc                 | 8-32Vdc 4X40W@24Vdc                    | 8-32Vdc 4X40W@24Vdc                    |
| D:DIMMERS     | 8-32Vdc 4X40W@24Vdc                 | 8-32Vdc 4X40W@24Vdc                 | 8-32Vdc 4X40W@24Vdc                 | 8-32Vdc 4X40W@24Vdc                    | 8-32Vdc 4X40W@24Vdc                    |
| MATERIALS     | STAINLESS STEEL                     | STAINLESS STEEL                     | STAINLESS STEEL                     | STAINLESS STEEL                        | STAINLESS STEEL                        |
| OPTIONAL      |                                     |                                     |                                     |  |  |
| SUPPLY        |                                     |                                     |                                     |  |  |
| P:PUSH BUTTON | 10mA MAX                            | 10mA MAX                            | 10mA MAX                            | 10mA MAX                               | 10mA MAX                               |

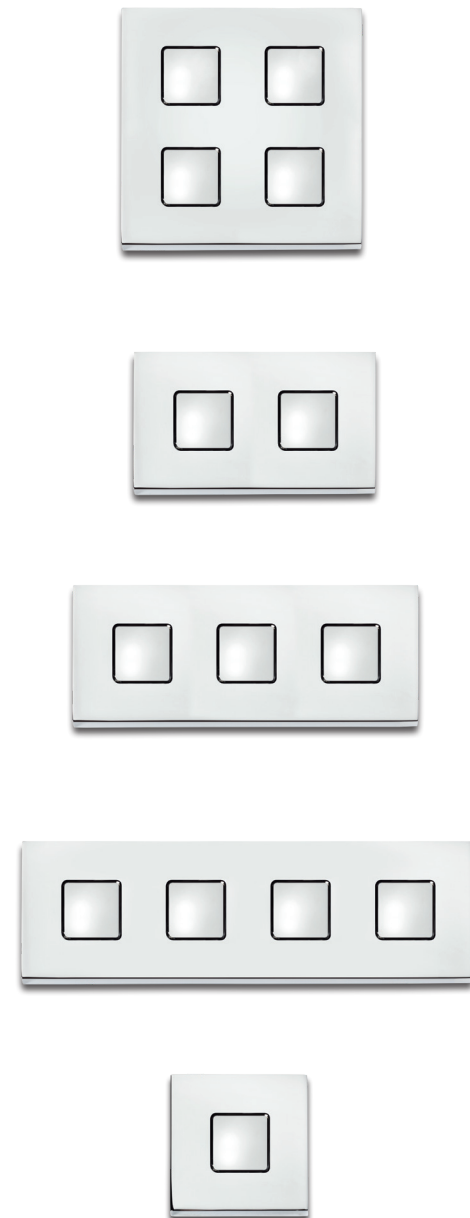


surf plate q

FE logo and finish selection options:

- FINISHES
- FE
- 23 (black)
- 20 (white)
- 4 (grey)
- 34 (dark grey)

# dot rs

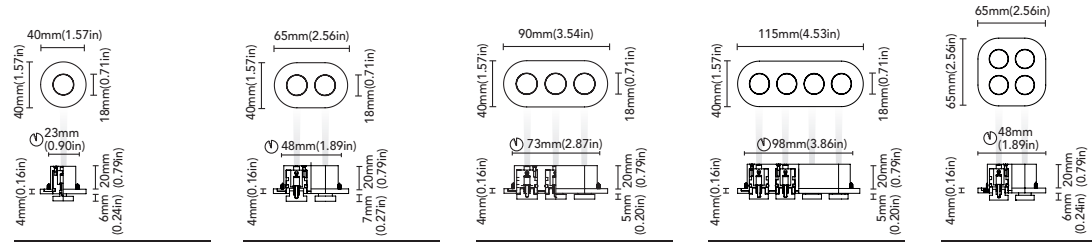

| CODE            |                      |                      |                      |                      |
|-----------------|----------------------|----------------------|----------------------|----------------------|
| TYPE            | 1 X PUSH BUTTON N.O. | 2 X PUSH BUTTON N.O. | 3 X PUSH BUTTON N.O. | 4 X PUSH BUTTON N.O. |
| MATERIALS       | BRASS                | BRASS                | BRASS                | BRASS                |
| MOUNTING SYSTEM | SCREWS               | SCREWS               | SCREWS               | SCREWS               |
| IP RATE         | IP40                 | IP40                 | IP40                 | IP40                 |




dot rs



# dot s

. 18



|                 |                      |
|-----------------|----------------------|
| CODE            |                      |
| TYPE            | 1 X PUSH BUTTON N.O. |
| MATERIALS       | BRASS                |
| MOUNTING SYSTEM | SCREWS               |
| IP RATE         | IP40                 |



dot s . pos. 1




dot s . pos. 2



# dot b

. 25



|                 |                      |
|-----------------|----------------------|
| CODE            |                      |
| TYPE            | 1 X PUSH BUTTON N.O. |
| MATERIALS       | BRASS                |
| MOUNTING SYSTEM | SCREWS               |
| IP RATE         | IP40                 |



dot b . pos. 1



dot b . pos. 2







# usb plate

. r

. q



| CODE            |           |
|-----------------|-----------|
| SUPPLY          | 8-32 Vdc  |
| POWER           | MAX 7.5W  |
| V OUTPUT        | 5 Vdc     |
| I OUTPUT        | 1.5 A MAX |
| MATERIALS       | BRASS     |
| MOUNTING SYSTEM | SCREWS    |
| IP RATE         | IP20      |

|                 |           |
|-----------------|-----------|
| SUPPLY          | 8-32 Vdc  |
| POWER           | MAX 7.5W  |
| V OUTPUT        | 5 Vdc     |
| I OUTPUT        | 1.5 A MAX |
| MATERIALS       | BRASS     |
| MOUNTING SYSTEM | SCREWS    |
| IP RATE         | IP20      |



usb plate . r




usb plate . q







# idro plate

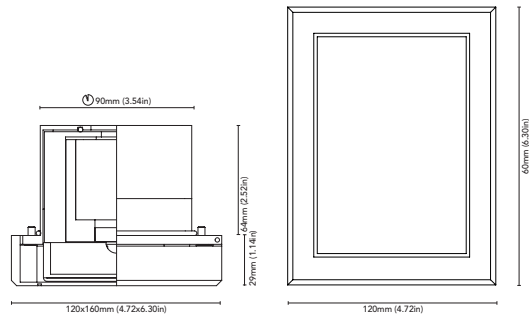

|                 |                          |
|-----------------|--------------------------|
| CODE            |                          |
| SUPPLY          | 230Vac                   |
| TYPE            | SCHUKO SOCKET            |
| MATERIALS       | STAINLESS STEEL AISI 316 |
| MOUNTING SYSTEM | SCREWS                   |
| OPTIONAL TYPE   | SCHUKO SOCKET+USB C      |

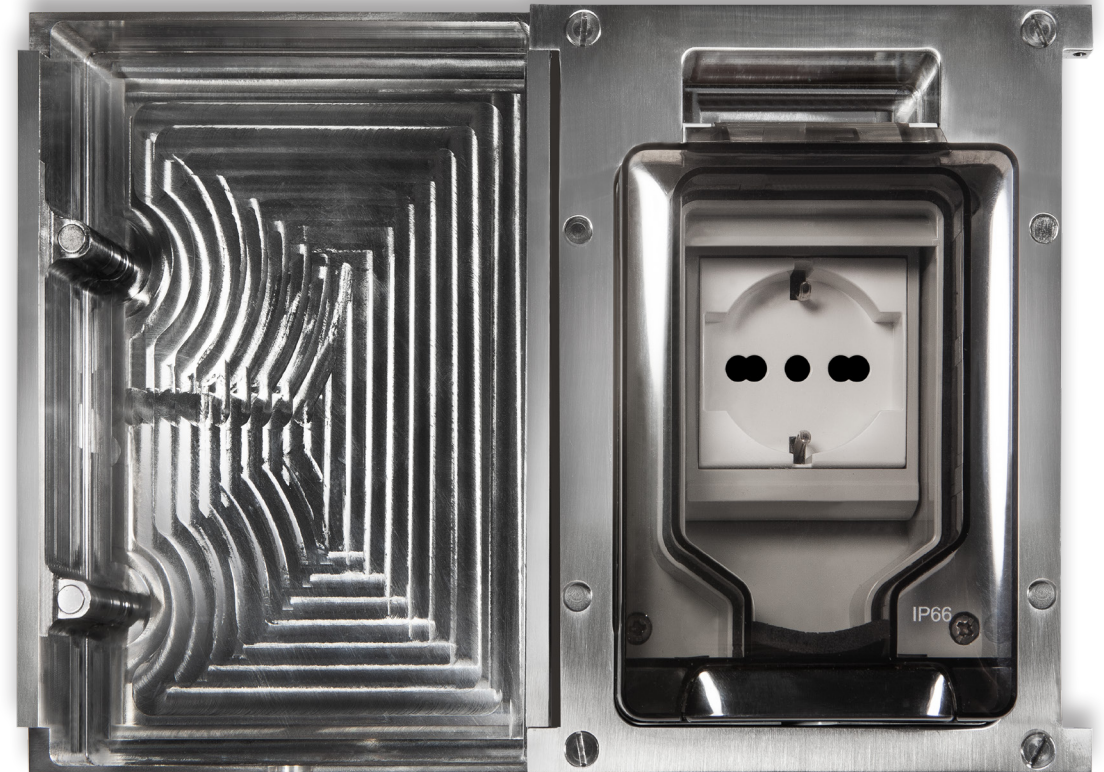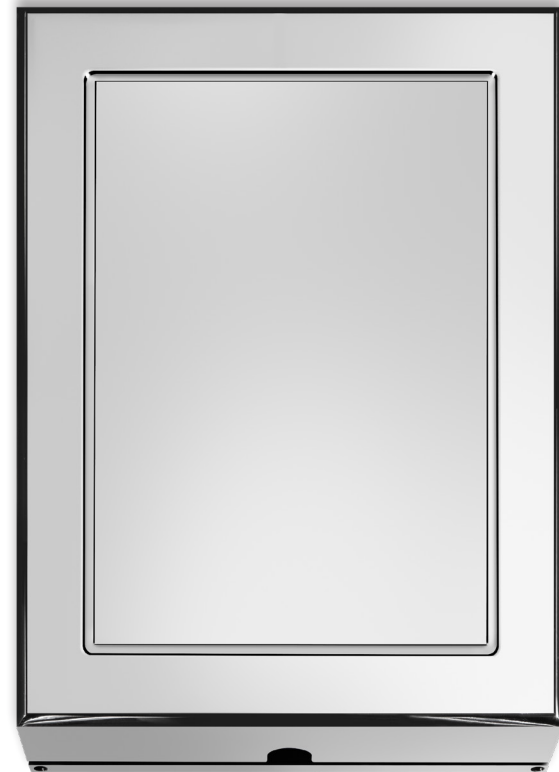

idro plate

|  |          |      |    |    |   |    |
|--|----------|------|----|----|---|----|
|  | FINISHES | FE-I | 23 | 20 | 4 | 34 |
|  |          |      | ●  | ○  | ● | ●  |



Via G. Pastore, 2 - 55041 Capezzano Pianore - Lucca - Italia  
tel. +39 0584 969632 - fax +39 0584 969578  
info@bcmilluminazione.com - [www.bcmilluminazione.com](http://www.bcmilluminazione.com)